

SERVICE BULLETIN



THE
Indian
MOTORCYCLE COMPANY


Bulletin No. SVB-129

Model SE & ME

Subject Port Timing Mod.

Date 1-26-73

PORT TIMING MOD. FOR SE & ME MODEL MOTORCYCLE

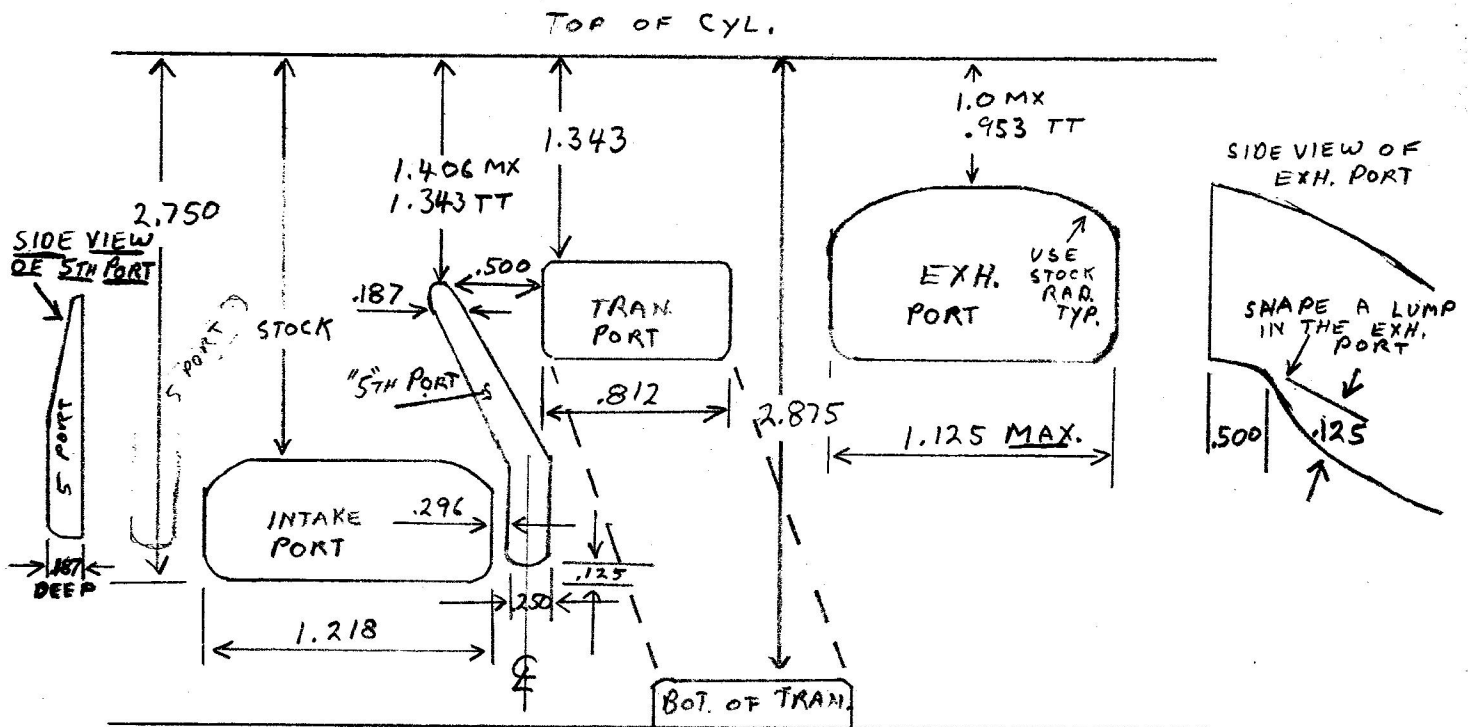

- NOTE:
- ① DRILL $\frac{1}{4}$ " HOLES ON THE ϕ OF THE "S" PORT GROVES, $\frac{9}{16}$ " FROM THE TOP OF THE PISTON (2 HOLES IN PISTON)
 - ② MX DIM. = MOTOR CROSS
 - ③ TT DIM. = FLAT TRACK
 - ④ CUT .060 OFF THE INTAKE SKIRT OF A STOCK PISTON FOR "MX"
 - ⑤ CUT .125 OFF THE INTAKE SKIRT OF A STOCK PISTON FOR "TT"
 - ⑥ CHAMFER ALL EDGES
 - ⑦ DO NOT CUT INTAKE SKIRT OF RACING PISTON
 - ⑧ MUST USE ALL OTHER H.P. PARTS OF INDIAN SE, ME-74-76/KIT

