

SERVICE BULLETIN



THE
Indian
MOTORCYCLE COMPANY

Bulletin No. SVB-166

Model JX-50

Subject CLUTCH LEVER
PULL


Date JULY 24, 1974

JX-50 CLUTCH LEVER PULL

To make the clutch lever pull very easily the following modifications can be performed:

1. Remove the clutch lever and clutch cable from the motorcycle.
2. Grind off the material indicated (picture) from the clutch lever. This prevents the lever from binding against the clutch lever bracket.

Picture #1

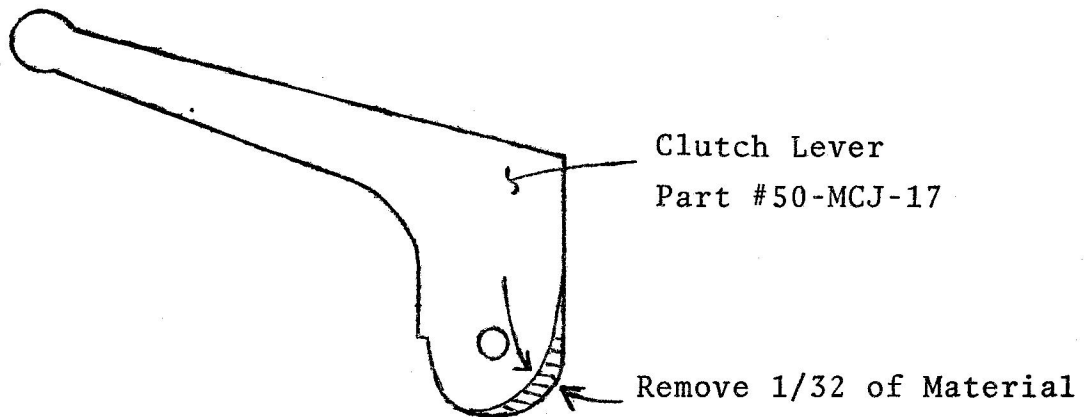

3. Grease the lever "pin" and "rub" parts and replace the lever back on to the clutch lever bracket.
4. Replace the standard clutch cable with cable #74-0170. This is a throttle cable that has less friction than a normal clutch cable. You must modify the new cable as follows:
 - A. Unsolder the small ball end of the cable.
 - B. Pull the inner cable out of the outer cable housing.
 - C. Discard the cable adjuster and small ball end.
 - D. Cut the outer cable off to be 30" long overall.
 - E. Lubricate and reassemble the cable back on to the clutch lever.

