

**CHARGING RATE WITH BATTERY INSTALLED IN MOTORCYCLE
 (Modified Full Wave System)**

R P M	25/25W HEADLIGHT Key in:	
	day position	night position
2,000	+0.1 amps	-0.8 amps
3,000	+0.4 amps	-0.7 amps
4,000	+0.8 amps	-0.5 amps
5,000	+1.2 amps	-0.3 amps
6,000	+1.6 amps	0 amps
7,000	+2.1 amps	+0.4 amps
8,000	+2.6 amps	+0.8 amps

Modified Full Wave Ignition Switch
 Type 1 (Back View)
 Illustration #4


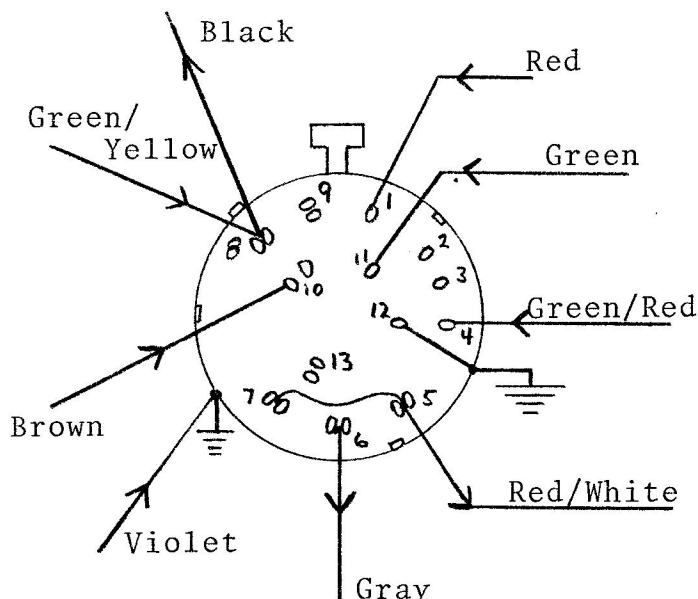


Illustration #6

Modified Full Wave Switch Code
 (For Type 1 and 2 Modified Switches)

Modified Full Wave Ignition Switch
 Type 2 (Back View)
 Illustration #5

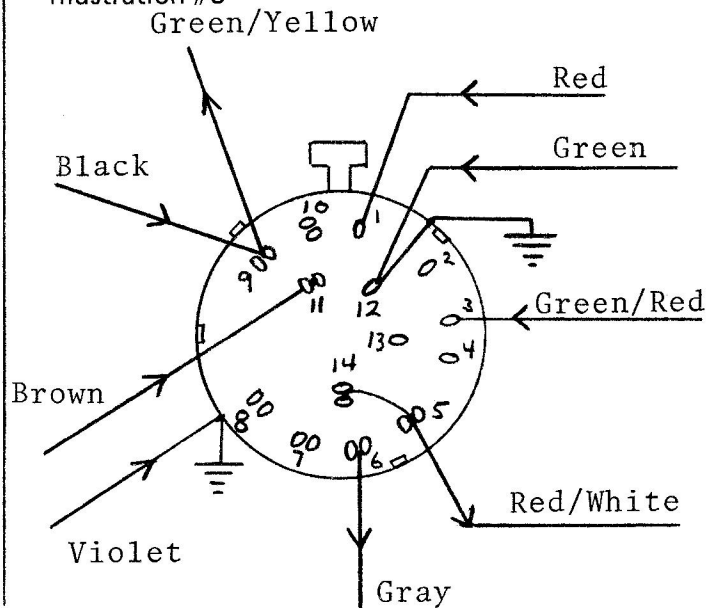

Key Pos.		Red	Green	Red/White	Green Red	Green Yell.	Brown	Viol.	Bk.	Gray
OFF										
1										
2										
3										

